

# CONTACT

[www.bradleycollection.com](http://www.bradleycollection.com)



## UK & REST OF THE WORLD

☎ +44 (0)1449 722 724

✉ [info@bradleycollection.com](mailto:info@bradleycollection.com)

## USA & CANADA

☎ +1 (310) 815 8255

✉ [info.us@bradleycollection.com](mailto:info.us@bradleycollection.com)

---

## LONDON SHOWROOM

☎ +44 (0)207 871 7793

✉ [showroom@studiotwochelsea.com](mailto:showroom@studiotwochelsea.com)

9 | THE BRADLEY  
COLLECTION

⚡ | DRIVE

THE BRADLEY  
COLLECTION



CEDIA  
MEMBER

Specialised fixings for mounting brackets will be required in certain situations and are not provided as standard.  
Steel items are not recommended for damp conditions such as shower rooms.  
Crystal finials should not be positioned in direct sunlight, and are not suitable for use in conservatories.  
Fluid Metal items are supplied unlacquered and will tarnish over time.

The Bradley Collection reserves the right to modify design and materials without prior notice as part of a process of continual product improvement. Due to printing limitations, colours in this brochure may not be accurate.

Products are protected by Design Rights, under provisions of Copyright, Designs & Patents Act 1988.  
Bradley®, The Bradley Collection® and  Logo are registered Community trademarks of The Bradley Collection Ltd. in Europe and registered trademarks of the Bradley Collection, Inc. in the USA.

**The Bradley Collection Ltd** Lion Barn • Maitland Road • Needham Market • Suffolk • IP6 8NS • UK

Printed: 1023 • Copyright © The Bradley Collection Ltd. 2023



# ⚡ | DRIVE

Innovative and exciting, Drive brings curtain poles firmly into the modern era. A full round pole style, a seamless look and a solution for any shape of window; all driven by your choice of drive and control.

DRIVE | THE NEW STANDARD

**Pictured:** Round  $\varnothing$ 38mm (1½") ⚡Pole • Ellipse • Glimmer

## LEADING MOTOR OPTIONS

Drive may be specified with your choice of motors from the leading brands. This provides power and control options ranging from standalone battery powered systems to fully integrated home automation solutions.



## SEAMLESS INNOVATION

The motor is turned through 90 degrees and rear-mounted via an embedded motor housing, finished in a complementary colour. The motor sits neatly and discreetly behind the drapes.




## GLIDING

Gypsum & Anthracite material now offered as standard for gliders, with coated metal gliders available for an exact colour match.



## MODERN

Modern sinuous heading styles can be created, using both hook and tape or snap tape components.

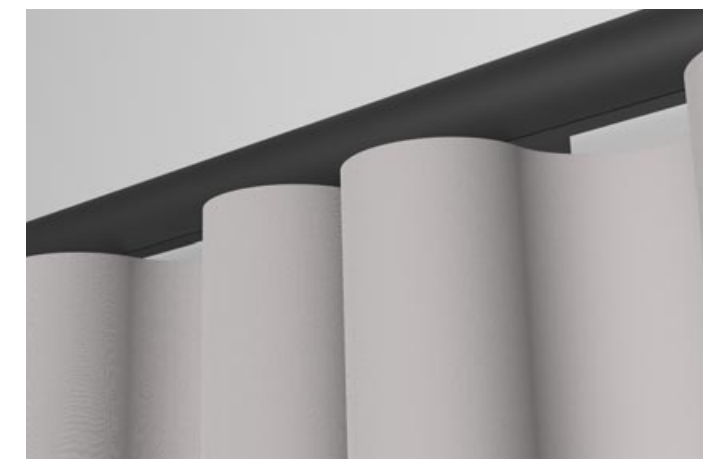


## UNOBTRUSIVE

The bracket architecture is shared with Glide and Float and keeps the front face of the pole clear of visible parts.



## PRECISE

A new jointing system ensures perfect alignment between pole sections.

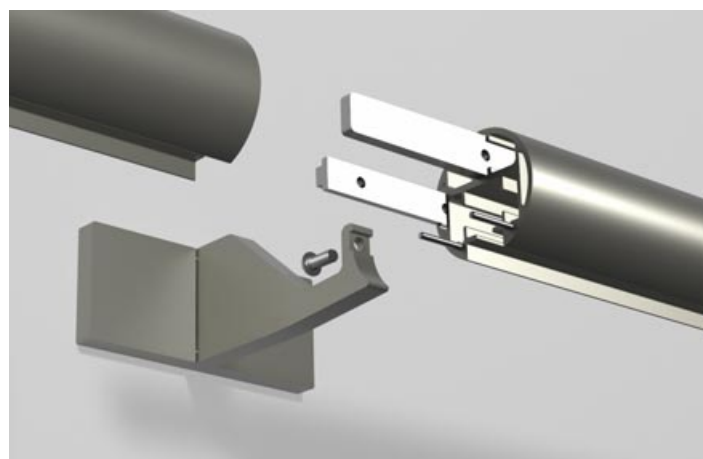

## FLUSH

The rear fixing brackets allow true flush ceiling mount for the first time.



## BENT TO SHAPE

The pole is designed to be accurately bent and curved to shape.



# FINISHES

This stunning palette of colours and finishes is available on all Gliderpoles and components, with a choice of coat options throughout.

## SHADES

A superb selection of opaque colours, all available in a choice of Matte, Satin or Gloss finish.



## COAT OPTIONS



## METALLICS

High metallic fleck coatings with most available in Satin and Gloss sheen levels.



## ANODIC METALS

A flat metal colour group, with an anodised style surface texture.



Pictured left to right:  
 ø38mm (1½") Pole | Spheric • Charcoal - Matte | Orbic Grand • Stone - Matte | Seamless • Lead - Matte  
 Tulip • Moss - Matte | Planar • Earth - Matte






**Pictured:**  
 ø38mm (1½") ↗ Pole • Seamless • Charcoal - Satin

## FINIALS




The fused ends of Drive embody the seamless design language of the collection. Drive is presented with a Seamless end cap as standard, giving the ultimate in clean minimalism.

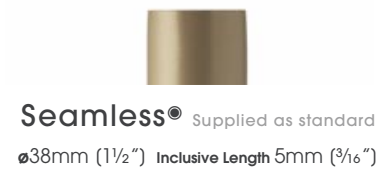The fused ends also allow understated geometric finial forms to be added for a hint of decorative detail.






© Please note that if this option is selected finials cannot be added at a later date.  
 For full technical information, sizes and weights please download the specification guide - [www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)


## SINGLE BRACKETS

<b>Side</b> 	<b>Diameter</b> ø38mm (1½")	<b>Projection from wall to pole centre</b> 100mm (4")	<b>Fixing plate size</b> w38mm (1½") x h89mm (3½")
<b>Mid</b> 	<b>Diameter</b> ø38mm (1½")	<b>Projection from wall to pole centre</b> 100mm (4")	<b>Fixing plate size</b> w89mm (3½") x h38mm (1½")
<b>Flush</b> 	<b>Diameter</b> ø38mm (1½")	<b>Drop from ceiling to top of pole</b> 1mm (1/16")	<b>Fixing plate size</b> w70mm (2¾") x h30mm (1¾")

## DOUBLE BRACKETS






<b>Side</b> 	<b>Diameter</b> Fø38mm (1½") Bø38mm (1½")	<b>Projection from wall to pole centre</b> F200mm (8") B100mm (4")	<b>Fixing plate size</b> w57mm (2¼") x h114mm (4½")
<b>Mid</b> 	<b>Diameter</b> Fø38mm (1½") Bø38mm (1½")	<b>Projection from wall to pole centre</b> F200mm (8") B100mm (4")	<b>Fixing plate size</b> w114mm (4½") x h57mm (2¼")
<b>Flush Partition</b> 	<b>Diameter</b> Fø38mm (1½") Bø38mm (1½")	<b>Drop from ceiling to top of pole</b> 1mm (1/16")	<b>Fixing plate size</b> w89mm (3½") x h38mm (1½")

## RECESS BRACKETS

<b>Recess with hook stop</b> 	<b>Diameter</b> ø38mm (1½")	<b>Depth off wall</b> 10mm (3/8")	<b>Fixing plate size</b> ø48mm (17/16")
---	--------------------------------	--------------------------------------	--

## CUSTOM BRACKETS

A bespoke design service is offered to ensure solutions in even the most challenging installations.

				
<b>Custom Projection</b> Specify the exact projection needed.	<b>Custom Fixing Plate</b> Relevant where space is restricted or weight is a concern.	<b>Uplift</b> Helps negotiate cornice and similar architectural features.	<b>Ceiling Brackets</b> Specify exact projection required from ceiling.	<b>Angled Brackets</b> The solution for tight and awkward locations.

## SYSTEMS

Electric double pole systems may be specified with a **DRIVE** pole to front and rear.

It is also possible to specify a motor to the main curtain and a manual pole to the rear. Simply select **DRIVE** for the front pole and either **GLIDE** Ø30mm (1¾") or 38mm (1½") for the rear.



# LUTRON® SIVOIA

Low voltage concealed motors  
 Three motor ratings for differing curtain weights  
 Quiet motors, noise level at 1000mm (3') <44dBA  
 Fully compatible with Lutron® QS Home Automation systems  
 Wireless remote control, app control or home automation integration

## MOTOR OPTIONS

### ⚡ Motor



**D105 • D145 • D175**  
 Mains powered motor options.  
 Requires professional installation.  
 Suitable for systems up to 15M (49ft).

### ⚡ Motor with radio dongle



**D105 • D145 • D175**  
 Mains powered motor options, with radio dongle for use with remote control options.  
 Requires professional installation.  
 Suitable for systems up to 15M (49ft).

## CONTROL OPTIONS

### Remote Control



Single hand held remote control option available.

### App Control RA2 Select Hub



The system can be controlled with the Lutron app or through smart devices & Amazon Alexa.

### Automation systems



The system can also be intergrated with all major home control systems.Ⓐ

⚡ Mains Power | Ⓐ Specialist support & additional components required  
 Weight restrictions apply. For full technical information please refer to the specification guide. [www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)

# SOMFY® GLYDEA, IRISMO & MOVELITE

Mains & Battery powered motor options  
 Touch and go manual operation  
 System allows manual operation during power failure  
 Quiet motors, noise level at 1000mm (3') <44dBA  
 Fully compatible with Somfy RTS  
 Wireless remote control, app control or home automation integration

## MOTOR OPTIONS

### ⚡ Glydea Ultra 60e



**WT • RTS**  
 Mains powered motor.  
 RTS includes integrated radio receiver for use with remote control options.  
 Requires professional installation.  
 Suitable for systems up to 12M (39ft).

### 🔋 Irismo 45 WF



**RTS**  
 Battery powered motor, with integrated radio receiver for use with remote control options.  
 Single charge lasts up to six months.  
 Requires no pre-wiring.  
 Suitable for systems up to 10M (33ft).

### ⚡ Movelite 35



**WT • RTS**  
 Mains powered motor.  
 RTS includes integrated radio receiver for use with remote control options.  
 Requires professional installation.  
 Suitable for systems up to 10M (33ft).

### 🔋 Movelite 35 WFⒸ



**RTS**  
 Battery powered motor, with integrated radio receiver for use with remote control options.  
 Single charge lasts up to four months.  
 Requires no pre-wiring.  
 Suitable for systems up to 6M (19ft)Ⓒ.

## CONTROL OPTIONS

### Remote Control



Single channel & Multi-channel hand held remote control options available.

### App Control Tahoma



The system can be controlled with the Somfy Tahoma app or through smart devices & Amazon Alexa.

### Automation systems



The system can also be intergrated with all major home control systems.Ⓐ

⚡ Mains Power | 🔋 Battery Power | Ⓒ Movelite35 WF is not suitable for bay bends | Ⓐ Specialist support & additional components required  
 Weight restrictions apply. For full technical information please refer to the specification guide. [www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)

# SILENT GLISS® 5600

Smooth, silent and powerful motors  
DC & AC hidden motor options  
Touch and go manual operation  
System allows manual operation during power failure  
Quiet motors, noise level at 300mm (1') <36dBA  
Wireless remote control, app control or home automation integration

## MOTOR OPTIONS

### ⚡ 9060 Motor



Mains & low voltage powered motor option.  
Requires professional installation.  
Suitable for systems up to 15M (49ft).  
Three colour options: White • Silver • Black

### ⚡ 9060 Motor with radio module



Mains powered motor, with radio module for use with remote control options.  
Requires professional installation.  
Suitable for systems up to 15M (49ft).  
Three colour options: White • Silver • Black  
Smart Expansion Module<sup>Ⓞ</sup> also available.

## CONTROL OPTIONS

### Remote Control



Single & Multi-channel hand held remote control options available.

### App Control Move



The system can be controlled with the Silent Gliss Move<sup>Ⓞ</sup> app to allow control on smart devices.

### Automation systems



The system can also be integrated with all major home control systems, and via Silent Gliss Smart<sup>Ⓞ</sup> system allowing two way integration with all major home control systems<sup>Ⓞ</sup>



## GLIDING OPTIONS



**Glider**  
Drop from bottom of track:  
15mm (5/8")

**Colour Options:**  
Gypsum • Anthracite




**Metalcoat Glider<sup>Ⓞ</sup>**  
Drop from bottom of track:  
15mm (5/8")

**Colour Options:**  
System Colour<sup>Ⓞ</sup> • Brushed Nickel



**Roller**  
Drop from bottom of track:  
15mm (5/8")

**Colour Options:**  
White • Black

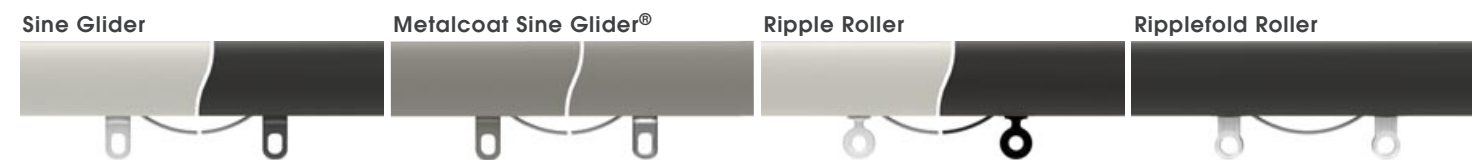

**Sine Glider**  
Drop from bottom of track:  
15mm (5/8")

**Sine Pitch:**  
80mm (3 1/8")

**Colour Options:**  
Gypsum • Anthracite

**Metalcoat Sine Glider<sup>Ⓞ</sup>**  
Drop from bottom of track:  
15mm (5/8")

**Sine Pitch:**  
80mm (3 1/8")

**Colour Options:**  
System Colour<sup>Ⓞ</sup> • Brushed Nickel

**Ripple Roller**  
Drop from bottom of track:  
15mm (5/8")

**Ripple Pitch:**  
80mm (3 1/8")

**Colour Options:**  
White • Black

**Ripplefold Roller**  
Drop from bottom of track:  
15mm (5/8")

**Ripplefold<sup>Ⓞ</sup> Fullness:**  
80% • 100% • 120%

**Colour Options:**  
White


Ⓞ Metalcoat Gliders, supplied in satin finish on Matte & Gloss finished systems

## POLES

Poles are cut, bent and curved to suit individual requirements.  
When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum pole length in one piece 4.0m (157")<sup>Ⓞ</sup>

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A pole joiner will be supplied.



**Diameter**  
ø38mm (1 1/2")

**Maximum distance between brackets**  
1000mm (39")

**Minimum bend radius**  
r400mm (16")