

# CONTACT

[www.bradleycollection.com](http://www.bradleycollection.com)



## UK & REST OF THE WORLD

+44 (0)1449 722 724

[info@bradleycollection.com](mailto:info@bradleycollection.com)

## USA & CANADA

+1 (310) 815 8255

[info.us@bradleycollection.com](mailto:info.us@bradleycollection.com)

---

## LONDON SHOWROOM

+44 (0)207 871 7793

[showroom@studiotwochelsea.com](mailto:showroom@studiotwochelsea.com)



ELEVATE

THE BRADLEY  
COLLECTION



Industry Partner

Supporting the interior design profession

CEDIA  
MEMBER

Specialised fixings for mounting brackets will be required in certain situations and are not provided as standard.  
Steel items are not recommended for damp conditions such as shower rooms.  
Crystal finials should not be positioned in direct sunlight, and are not suitable for use in conservatories.  
Fluid Metal items are supplied unlacquered and will tarnish over time.

The Bradley Collection reserves the right to modify design and materials without prior notice as part of a process of continual product improvement. Due to printing limitations, colours in this brochure may not be accurate.

Products are protected by Design Rights, under provisions of Copyright, Designs & Patents Act 1988.  
Bradley®, The Bradley Collection® and  Logo are registered Community trademarks of The Bradley Collection Ltd. in Europe and registered trademarks of the Bradley Collection, Inc. in the USA.

The Bradley Collection Ltd Lion Barn • Maitland Road • Needham Market • Suffolk • IP6 8NS • UK

Printed: 1024 • Copyright © The Bradley Collection Ltd. 2024



# ⚡ | ELEVATE

Peerless and opulent, this collection truly has no rival.

A rare, luxurious aesthetic and freedom of expression in design are balanced with the final word in functionality and control.

The world's finest.

**Pictured:** ø38mm (1½") Coverpole - Lutron • Standard Stud • Brass Toned  
**Project by:** Gallagher London • London SW7 - UK

## LEADING MOTOR OPTIONS

Elevate may be specified with your choice from the leading motorised systems. This provides power and control options ranging from standalone battery powered systems to fully integrated home automation solutions.



For Double pole systems, a hand drawn rear pole may be specified if preferred.




## LENGTH

Poles can be supplied to any length<sup>Ⓞ</sup>, subject to maximum weight loadings of the selected motorised system.




## BENT TO SHAPE

A bespoke bay bending service is available on all diameters to allow the perfect shaped pole to fit any bay window.<sup>Ⓞ</sup>

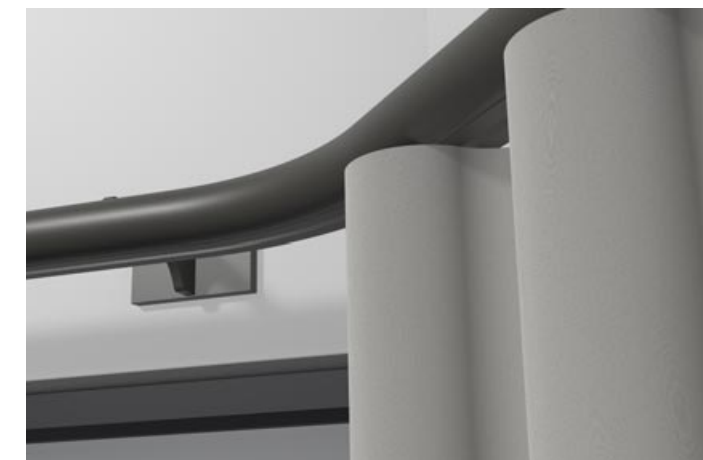

## SCALE

Elevate poles are available in two pole diameters, Ø38mm (1½") • 50mm (2"). Finial designs are carefully scaled to maintain the system aesthetic.

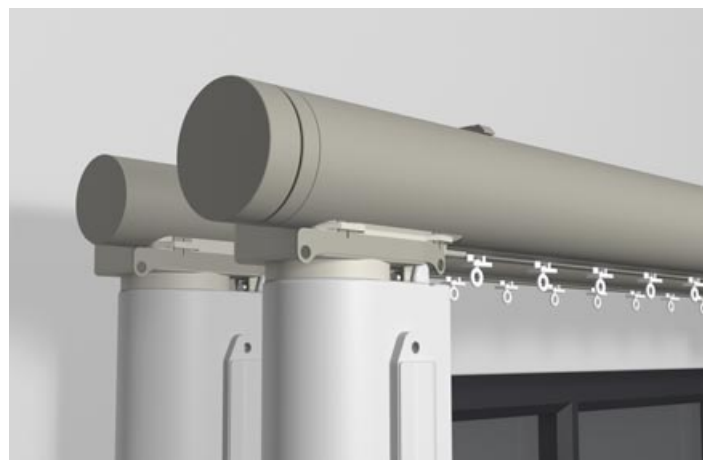


## DETAILING

The secret of any design is in the detail. Nylon end housings are finished in a complementary colour, for a harmonious tonal effect.



## FUNCTION

A range of bracket options have been designed to ensure simple installation, including flush fit ceiling brackets.

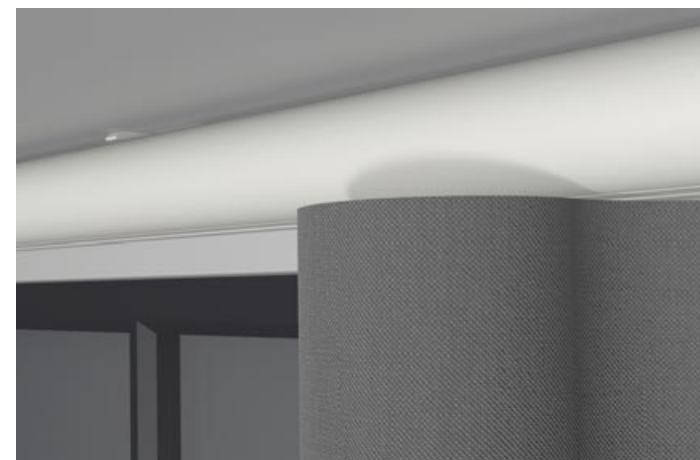

## MODERN HEADINGS

The choice of motor systems means that modern headings can be accommodated, with both Wave<sup>®</sup> and Ripplefold<sup>®</sup> styles available.




<sup>Ⓞ</sup> Supplied in sections - Maximum section length 2.9m (114") | <sup>Ⓞ</sup> Brushed finishes not available with bends

## EDGE

Edge is the epitome of understatement, being sleek, discreet and integrated. Available in two pole diameters, Ø38mm (1½") • 50mm (2").

The unique Edge bracket design gives a structured return to the wall for drapes and incorporates an adjustable return-to-wall hook eye.


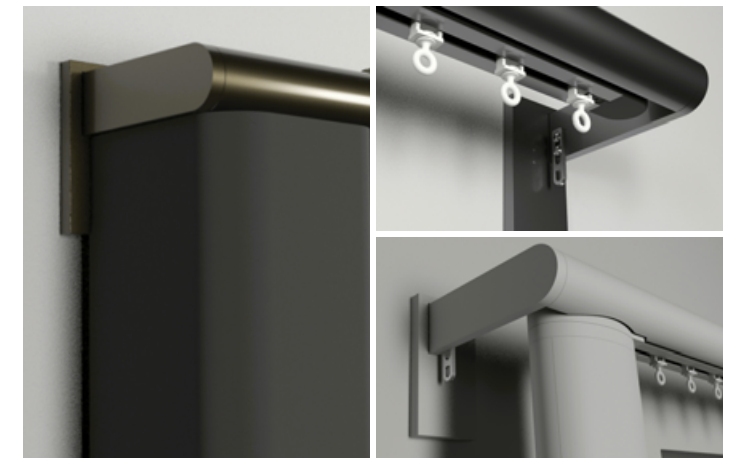


# FINISHES

All poles and components may be specified in this stunning palette of colours and finishes, with a choice of coat options throughout.

## SHADES

A superb selection of opaque colours, all available in a choice of Matte, Satin or Gloss finish.

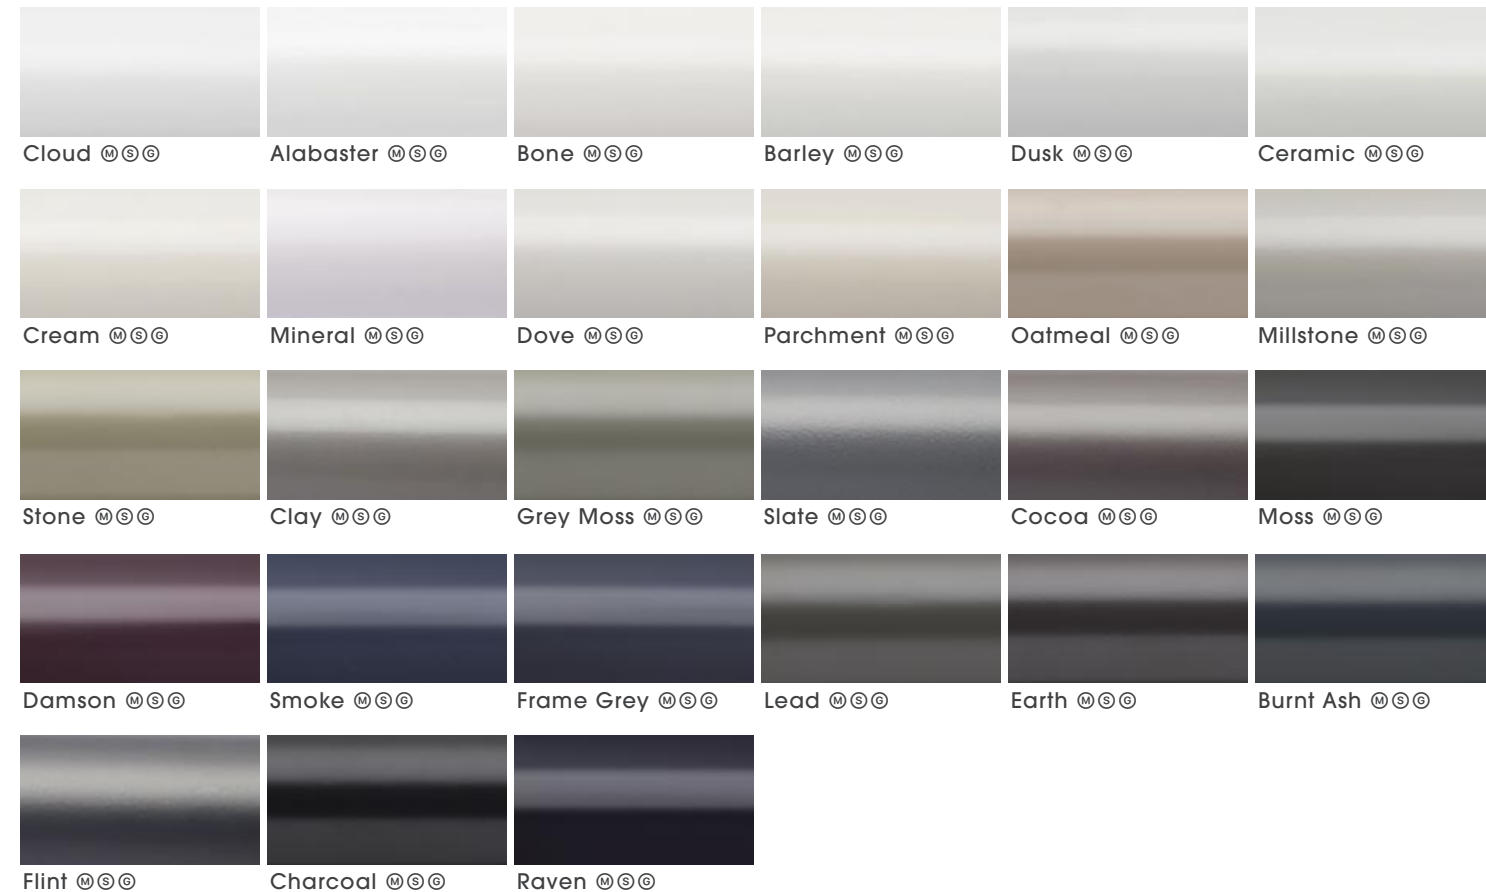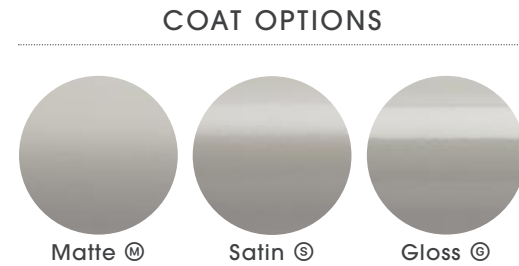

## METALLICS

High metallic fleck coatings with most available in Satin and Gloss sheen levels.



## ANODIC METALS

A flat metal colour group, with an anodised style surface texture.



## STAINLESS STEEL

A brushed stainless steel base gives an edgy feel.



## CLASSICS

Signature translucent finishes which allow the beauty of steel to shine through.



Ⓢ Brushed finishes not available with bends



Pictured: ø38mm (1 1/2") Coverpole - Somfy • Contrast Stud • Light Bronze

## SPECIALIST FINISHES

Specialist techniques are employed to deliver additional finish choices. These more complex finishes are available at a premium cost and with longer lead times.

### STAINLESS TINTS

Brushed stainless steel, in subtle tinted hues gives an industrial aesthetic.



Brushed Brass ⊕⊕⊗

Brushed Bronze ⊕⊕⊗

Brushed Carbon ⊕⊕⊗

### FLUID METAL™

Leading edge technology allows authentic metal coats to be applied to any substrate, which can then be worked and aged for a truly luxurious result.



Old Brass ⊕⊕⊗✎

Light Bronze ⊕⊕⊗✎

Bronze Art ⊕⊕⊗✎

⊕ A finishing charge will apply | ⊗ Longer lead-times will apply | ✎ Fluid Metal finishes are supplied unlacquered and will tarnish over time, a clear lacquer may be applied on request as a custom finish  
✎ Fluid Metal finishes are hand produced, finish may vary | ⊗ Brushed finishes not available with bends

# FINIALS

This design edit provides a solution for any project. Sharp, geometric designs give Elevate a thoroughly modern persona, while rounded design cues offer a more classic feel, albeit still expressed with a more contemporary hand.



**Pictured:** ø38mm (1½") Coverpole - Silent Gliss • Faceted Disc • Brushed Stainless



**Flush End Cap**® Supplied as standard

ø38mm (1½") Inclusive Length 6mm (¼")  
ø50mm (2") Inclusive Length 6mm (¼")



**Standard Stud**

ø38mm (1½") Inclusive Length 9mm (⅜")  
ø50mm (2") Inclusive Length 10mm (⅜")



**Button Stud**

ø38mm (1½") Inclusive Length 58mm (2⅝")  
ø50mm (2") Inclusive Length 69mm (2⅞")



**Ball & Collar**

ø38mm (1½") Inclusive Length 86mm (3⅜")  
ø50mm (2") Inclusive Length 106mm (4⅜")



**Contrast Stud**

ø38mm (1½") Inclusive Length 20mm (⅞")  
ø50mm (2") Inclusive Length 23mm (⅞")



**Large Disc**

ø38mm (1½") Inclusive Length 7mm (¼")  
ø50mm (2") Inclusive Length 8mm (⅕")



**Faceted Disc**

ø38mm (1½") Inclusive Length 45mm (1¾")  
ø50mm (2") Inclusive Length 59mm (2⅝")



**Ball**

ø38mm (1½") Inclusive Length 86mm (3⅜")  
ø50mm (2") Inclusive Length 106mm (4⅜")

© Please note that if this option is selected finials cannot be added at a later date.

For full technical information, sizes and weights please download the specification guide - [www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)

# SINGLE BRACKETS

<b>Side</b>	<b>Diameter</b> ø38mm (1½") ø50mm (2")	<b>Projection from wall to track centre</b> 100mm (4") 100mm (4")	<b>Fixing plate size</b> w52mm (2½") x h104mm (4½") w52mm (2½") x h104mm (4½")
-------------	----------------------------------------------	-------------------------------------------------------------------------	--------------------------------------------------------------------------------------

<b>Mid</b>	<b>Mid - Joining</b>	<b>Diameter</b> ø38mm (1½") ø50mm (2")	<b>Projection from wall to track centre</b> 100mm (4") 100mm (4")	<b>Fixing plate size</b> w104mm (4½") x h52mm (2½") w104mm (4½") x h52mm (2½")
------------	----------------------	----------------------------------------------	-------------------------------------------------------------------------	--------------------------------------------------------------------------------------

<b>Flush</b>	<b>Flush - Joining</b>	<b>Diameter</b> ø38mm (1½") ø50mm (2")	<b>Drop from ceiling to top of pole</b> 3mm (⅛") 3mm (⅛")	<b>Fixing plate size</b> w70mm (2¾") x h34mm (1⅝") w70mm (2¾") x h34mm (1⅝")
--------------	------------------------	----------------------------------------------	-----------------------------------------------------------------	------------------------------------------------------------------------------------

# DOUBLE BRACKETS

<b>Side</b>	<b>Diameter</b> Fø38mm (1½") Bø38mm (1½") Fø38mm (1½") B Uncovered track Fø50mm (2") Bø38mm (1½") Fø50mm (2") Bø50mm (2") Fø50mm (2") B Uncovered track	<b>Projection from wall to track centre</b> F160mm (6⅝") B 60mm (2⅜") F160mm (6⅝") B 60mm (2⅜") F160mm (6⅝") B 60mm (2⅜") F160mm (6⅝") B 60mm (2⅜") F160mm (6⅝") B 60mm (2⅜")	<b>Fixing plate size</b> w52mm (2½") x h104mm (4½") w52mm (2½") x h104mm (4½") w52mm (2½") x h104mm (4½") w52mm (2½") x h104mm (4½") w52mm (2½") x h104mm (4½")
-------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

<b>Mid</b>	<b>Mid - Joining</b>	<b>Diameter</b> Fø38mm (1½") Bø38mm (1½") Fø38mm (1½") B Uncovered track Fø50mm (2") Bø38mm (1½") Fø50mm (2") Bø50mm (2") Fø50mm (2") B Uncovered track	<b>Projection from wall to track centre</b> F160mm (6⅝") B 60mm (2⅜") F160mm (6⅝") B 60mm (2⅜") F160mm (6⅝") B 60mm (2⅜") F160mm (6⅝") B 60mm (2⅜") F160mm (6⅝") B 60mm (2⅜")	<b>Fixing plate size</b> w104mm (4½") x h52mm (2½") w104mm (4½") x h52mm (2½") w104mm (4½") x h52mm (2½") w104mm (4½") x h52mm (2½") w104mm (4½") x h52mm (2½")
------------	----------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

# EDGE BRACKETS

<b>Single - End</b>	<b>Diameter</b> ø38mm (1½") ø50mm (2")	<b>Projection from wall to pole centre</b> 100mm (4") 100mm (4")	<b>Fixing plate size</b> w52mm (2½") x h104mm (4½") w52mm (2½") x h104mm (4½")
---------------------	----------------------------------------------	------------------------------------------------------------------------	--------------------------------------------------------------------------------------

<b>Double - End</b>	<b>Diameter</b> Fø38mm (1½") Bø38mm (1½") Fø50mm (2") Bø38mm (1½") Fø50mm (2") Bø50mm (2")	<b>Projection from wall to pole centre</b> F160mm (6⅝") B 60mm (2⅜") F160mm (6⅝") B 60mm (2⅜") F160mm (6⅝") B 60mm (2⅜")	<b>Fixing plate size</b> w52mm (2½") x h104mm (4½") w52mm (2½") x h104mm (4½") w52mm (2½") x h104mm (4½")
---------------------	-----------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------

# CUSTOM BRACKETS

Elevate can be customised to suit virtually any window.



**Custom Projection**

Specify the exact projection needed.



**Custom Fixing Plate**

Relevant where space is restricted or weight is a concern.



**Uplift**

Helps negotiate cornice and similar architectural features.



**Dropdown Ceiling**

Specify exact projection required from ceiling.



**Angled Brackets**

The solution for tight and awkward locations.

# ELECTRIC DRAPERY HARDWARE

For the full range of Electric poles and tracks visit [www.bradleycollection.com/electric](http://www.bradleycollection.com/electric)

Handed Item - Left and Right version available



# LUTRON® SIVOIA



Straight poles maximum length 9 Metres (29.5ft)<sup>Ⓞ</sup>  
 Bespoke bay service<sup>Ⓞ</sup>  
 Standard rollers and Ripplefold<sup>®</sup> rollers  
 Low voltage concealed motors  
 Three motor ratings for differing curtain weights

Quiet motors, noise level at 1000mm (3') <44dBA  
 Fully compatible with Lutron<sup>®</sup> QS Home Automation systems  
 Wireless remote control, app control or home automation integration

## MOTOR OPTIONS

### ⚡ Motor



**D105 • D145 • D175**  
 Mains powered motor options.  
 Requires professional installation.  
 Suitable for systems up to 15M (49ft).

### ⚡ Motor with radio dongle



**D105 • D145 • D175**  
 Mains powered motor options, with radio  
 dongle for use with remote control options.  
 Requires professional installation.  
 Suitable for systems up to 15M (49ft).

## CONTROL OPTIONS

### Remote Control



Single hand held remote control  
 option available.

### App Control RA2 Select Hub



The system can be controlled with the Lutron  
 app or through smart devices & Amazon  
 Alexa.

### Automation systems



The system can also be intergrated with all  
 major home control systems.<sup>Ⓞ</sup>

⚡ Mains Power | Ⓞ Specialist support & additional components required  
 Weight restrictions apply. For full technical information please refer to the specification guide. [www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)

## GLIDING OPTIONS

Lutron can be supplied with 2 gliding options: Standard Rollers,  
 or Ripplefold<sup>®</sup> Rollers to be used with Graber or Kirsch snap header tape.

### Rollers



**Drop from bottom of track:**  
 12mm (7/16")  
**Colour Options:**  
 White

### Ripplefold<sup>®</sup> Rollers



**Drop from bottom of track:**  
 20mm (13/16")  
**Ripplefold<sup>®</sup> Fullness:**  
 80% • 100% • 120%  
**Colour Options:**  
 White

## POLES

Poles are cut and bent to suit individual requirements. When calculating the length of your pole, remember to allow tolerance  
 beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum Coverpole length in one piece 2.9m (114")<sup>Ⓞ</sup>. Poles exceeding the maximum length will be cut into equal parts unless  
 otherwise specified. A joining bracket will need to be specified.



**Size**  
 ø38mm (1½")  
 ø50mm

**Maximum distance between brackets**  
 1500mm (60")  
 1500mm (60")

**Minimum bend radius**  
 R275mm (10¾")  
 R275mm (10¾")

Ⓞ Supplied in sections - maximum section length 2.9m (9.5ft) | Ⓞ Brushed finishes not available with bends

# SOMFY® GLYDEA, IRISMO & MOVELITE



Straight poles maximum length 12 Metres (39ft)Ⓞ  
 Bespoke bay serviceⓄⓈ  
 Standard rollers, Ripple rollers and Ripplefold® rollers  
 Mains & Battery powered motor options  
 Touch and go manual operation

System allows manual operation during power failure  
 Quiet motors, noise level at 1000mm (3') <44dBA  
 Fully compatible with Somfy RTS  
 Wireless remote control, app control or home automation integration

## MOTOR OPTIONS

### ⚡ Glydea Ultra 60e



**WT • RTS**  
 Mains powered motor.  
 RTS includes integrated radio receiver for use with remote control options.  
 Requires professional installation.  
 Suitable for systems up to 12M (39ft).

### 🔋 Irismo 45 WF



**RTS**  
 Battery powered motor, with integrated radio receiver for use with remote control options.  
 Single charge lasts up to six months.  
 Requires no pre-wiring.  
 Suitable for systems up to 10M (33ft).

### ⚡ Movelite 35



**WT • RTS**  
 Mains powered motor.  
 RTS includes integrated radio receiver for use with remote control options.  
 Requires professional installation.  
 Suitable for systems up to 10M (33ft).

### 🔋 Movelite 35 WF



**RTS**  
 Battery powered motor, with integrated radio receiver for use with remote control options.  
 Single charge lasts up to four months.  
 Requires no pre-wiring.  
 Suitable for systems up to 6M (19ft)Ⓞ.

## CONTROL OPTIONS

### Remote Control



Single channel & Multi-channel hand held remote control options available.

### App Control Tahoma



The system can be controlled with the Somfy Tahoma app or through smart devices & Amazon Alexa.

### Automation systems




The system can also be intergrated with all major home control systems.Ⓞ

⚡ Mains Power | 🔋 Battery Power | Ⓞ Movelite35 WF is not suitable for bay bends | Ⓢ Specialist support & additional components required  
 Weight restrictions apply. For full technical information please refer to the specification guide. [www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)

## GLIDING OPTIONS

Somfy is available in 3 gliding options: Standard Rollers, Ripple Rollers, to be used with wave-style header tape. Or Ripplefold® Rollers to be used with Graber or Kirsch snap header tape.

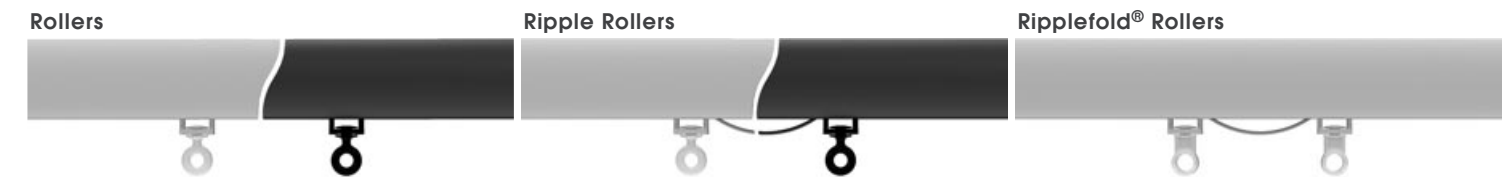

**Drop from bottom of track:**  
 20mm (3/8")  
**Colour Options:**  
 White • Black

**Drop from bottom of track:**  
 20mm (3/8")  
**Ripple Pitch:**  
 80mm (3 1/8")  
**Colour Options:**  
 White • Black

**Drop from bottom of track:**  
 20mm (3/8")  
**Ripplefold® Fullness:**  
 80% • 100% • 120%  
**Colour Options:**  
 White

## POLES

Poles are cut and bent to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum Coverpole length in one piece 2.9m (114")Ⓞ. Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.



**Size**  
 ø38mm (1 1/2")  
 ø50mm

**Maximum distance between brackets**  
 1500mm (60")  
 1500mm (60")

**Minimum bend radius**  
 R275mm (10 3/16")  
 R275mm (10 3/16")

Ⓞ Supplied in sections - maximum section length 2.9m (9.5ft) | Ⓢ Brushed finishes not available with bends

# SILENT GLISS® 5600



Straight poles maximum length 25 Metres (82ft)<sup>Ⓞ</sup>  
 Bespoke bay service<sup>Ⓞ</sup>  
 Standard gliders and rollers & Wave<sup>®</sup> gliders and rollers  
 Smooth, silent and powerful motors  
 DC & AC hidden motor options

Touch and go manual operation  
 System allows manual operation during power failure  
 Quiet motors, noise level at 300mm (1') <36dBA  
 Wireless remote control, app control or home automation integration

## MOTOR OPTIONS

### ⚡ 9060 Motor



Mains & low voltage powered motor option.  
 Requires professional installation.  
 Suitable for systems up to 15M (49ft).  
 Three colour options: White • Silver • Black

### ⚡ 9060 Motor with radio module



Mains powered motor, with radio module for use with remote control options.  
 Requires professional installation.  
 Suitable for systems up to 15M (49ft).  
 Three colour options: White • Silver • Black  
 Smart Expansion Module<sup>Ⓞ</sup> also available.

## CONTROL OPTIONS

### Remote Control



Single & Multi-channel hand held remote control options available.

### App Control Move



The system can be controlled with the Silent Gliss Move<sup>Ⓞ</sup> app to allow control on smart devices.

### Automation systems




The system can also be integrated with all major home control systems, and via Silent Gliss Smart<sup>Ⓞ</sup> system allowing two way integration with all major home control systems<sup>Ⓞ</sup>

⚡ Mains Power | Ⓞ Move server set 9960 is required for use with this app | Ⓞ Smart only available in United Kingdom, requires Smart Expansion Module | Ⓞ Specialist support & additional components required | Weight restrictions apply. For full technical information please refer to the specification guide. [www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)

## GLIDING OPTIONS


Silent Gliss 5600 is available in 4 gliding options: Standard Gliders & Rollers, or Wave<sup>®</sup> Gliders & Rollers to be used with Wave<sup>®</sup> header tape.

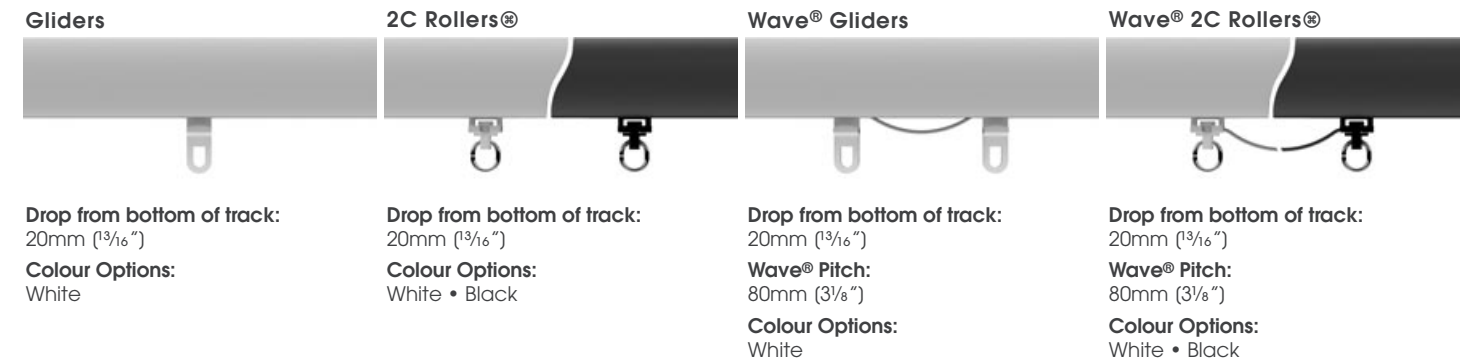

## POLES

Poles are cut and bent to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum Coverpole length in one piece 2.9m (114")<sup>Ⓞ</sup>. Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.

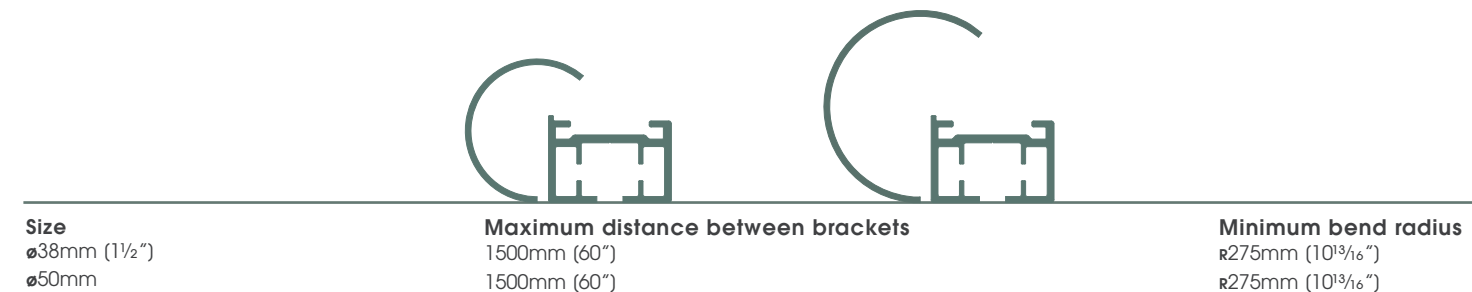

Ⓞ Supplied in sections - maximum section length 2.9m (9.5ft) | Ⓞ Brushed finishes not available with bends  
 Ⓞ Supplied as standard on systems over 2.9m (9.5ft) with single stack curtains